

# TP 400

## Performance Gap Filler Pad

TP 400 elevates the thermal performance bar, achieving 4 W/mK while maintaining a hardness of 55 (shore 00). The low hardness in comparison to thermal conductivity proves that TP 400 will meet the demands of your challenging design requirements.



### Features and Benefits

- 4.0 W/mK
- Low Silicone Oil Extraction
- Naturally tacky, easing application
- Low pressure versus deflection
- Excellent, high volume applications
- Elevated Temperature Resistance

### Typical Applications

- Networking and Telecommunications
- IT: Notebooks, Tablets, Power Conversion
- Industrial: LEDs, Power Supplies and Conversion
- Automotive: Control Modules, Turbo Actuators
- Consumer Electronics: Gaming Systems, LCDs, and Graphic Cards

Typical Properties		
Attribute	Value	Test Method
	TP 400	-
Composition	Ceramic Filler + Silicone	-
Color	Purple	Visual
Thickness (mm)	0.5 to 10.0	ASTM D374
Density (g/cc)	3.1	ASTM D792
Hardness (Shore OO)	55(Thickness≤1.0 Shore OO 60)	ASTM D2240
Usage Temperature (°C)	- 60 to 200	-
Electrical		
Breakdown Voltage (kV/mm)	> 6.0	ASTM D149
Volume Resistivity (Ω.cm)	10 <sup>13</sup>	ASTM D257
Dielectric Constant	< 7.5	ASTM D150
Flammability	V-0	UL 94
Thermal		
Thermal Conductivity (W/m-K)	4.0	ISO 22007-2

### Storage

Store in a cool, dry, well-ventilated place.

### Shelf life

Shelf life of the product is 12 months after date of shipment

Any information provided in this document is considered accurate. All specifications are subject to change without notice. All products and services are sold under the terms and conditions of sale. Neither the seller nor the manufacturer is liable for any direct, incidental or consequential loss or damage to the infringement or contract, including loss of profits or income resulting from the use or inability to use the product. Unless the seller and the manufacturer's official sign the agreement, the seller or the purchaser's statement, purchase order or advice not included here shall have no effect or effect. © Copyright 2019, AOCHUAN TECHNOLOGY.




# TP 400

## Performance Gap Filler Pad


### Thickness vs. Thermal Resistance

Reference only

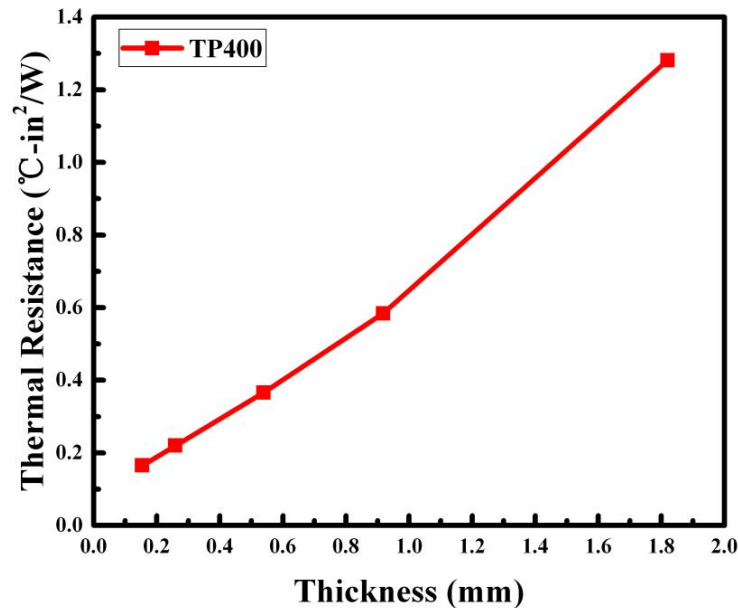

### Pressure vs. Deflection

Reference only

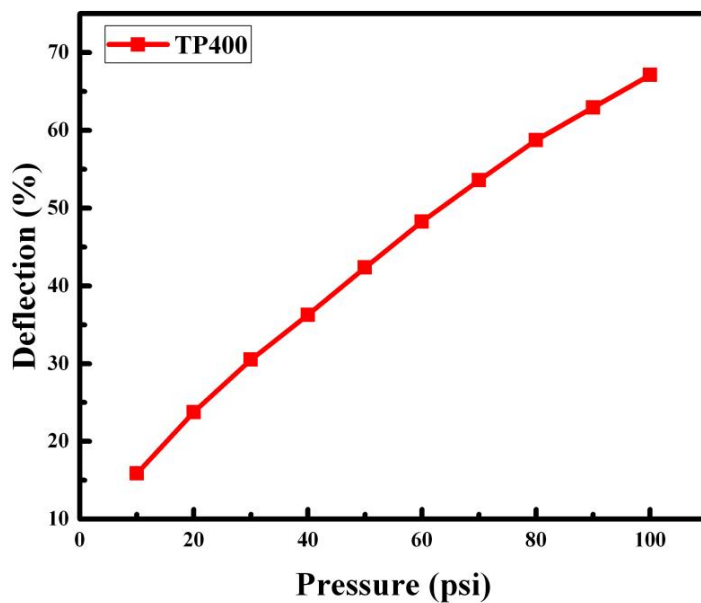

Any information provided in this document is considered accurate. All specifications are subject to change without notice. All products and services are sold under the terms and conditions of sale. Neither the seller nor the manufacturer is liable for any direct, incidental or consequential loss or damage to the infringement or contract, including loss of profits or income resulting from the use or inability to use the product. Unless the seller and the manufacturer's official sign the agreement, the seller or the purchaser's statement, purchase order or advice not included here shall have no effect or effect. © Copyright 2019, AOCHUAN TECHNOLOGY.

